

Check valves Series VC/L

BUROCCO
INDUSTRIAL VALVES srl

Technical data

Size (DN)	DN 6 - 50
Rating	PN 40
Connections	Threaded GAS - ISO 228
Plug characteristic	Disc
Opening pressure	0,25 bar
Temperature	-20 to +120 °C

Description

Unidirectional check valve obtained from bar.
Solid and compact shape with low loss of load and maximum hydraulic efficiency.

They can be employed in several sector as: textile dyeing and finishing plants, chemical plants, water-treating, alimentary, general industrial plants.

Options

- ⇒ Threads NPT - METRIC
- ⇒ Different opening pressure
- ⇒ Special executions on request



Check valves Series VC/L


BUROCCO INDUSTRIAL VALVES srl

BUROCCO INDUSTRIAL VALVES srl VIA NOVEIS, 33 – 13867 PRAY (BI) - ITALY



info@burocco.it — www.burocco.it

Tel.: +39 015 76.72.78 — Fax: +39 015 76.71.36

Materials	
Valve body	AISI 316/316L
Packing	FPM (STD) - NBR - EPDM - PTFE - SILICON

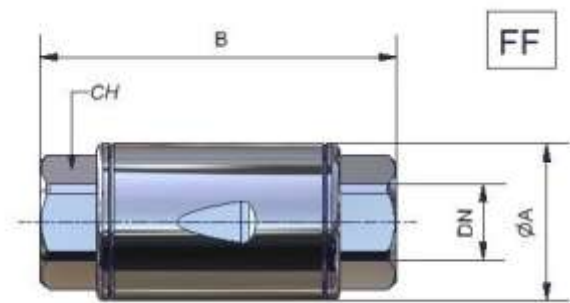

DN	Ø A	B	CH	weight (Kg)
6 (1/8")	22	50	17	0,08
8 (1/4")	22	50	17	0,08
10 (3/8")	30	67	22	0,18
15 (1/2")	30	71	25	0,18
20 (3/4")	42	84	32	0,28
25 (1")	42	90	38	0,41
32 (1"1/4)	55	118	50	0,98
40 (1"1/2)	70	130	60	1,67
50 (2")	85	162	70	2,68

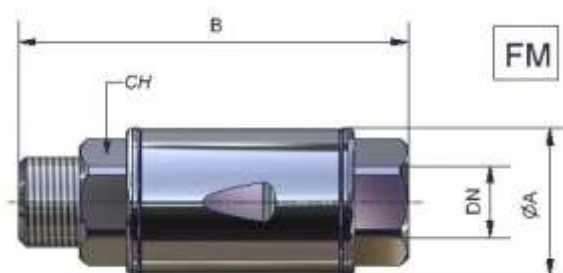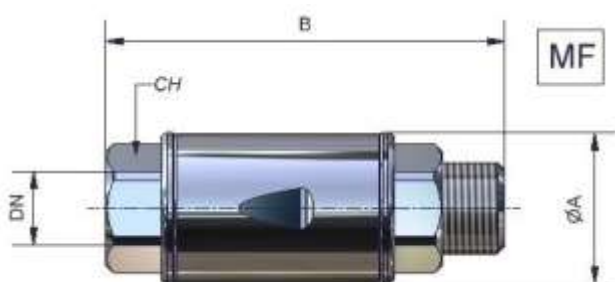

DN	Ø A	B	CH	weight (Kg)
6 (1/8")	22	56	17	0,08
8 (1/4")	22	58	17	0,08
10 (3/8")	30	75	22	0,19
15 (1/2")	30	79	25	0,19
20 (3/4")	42	98	32	0,31
25 (1")	42	104	38	0,51